


### Pivot hinge - MPH-300

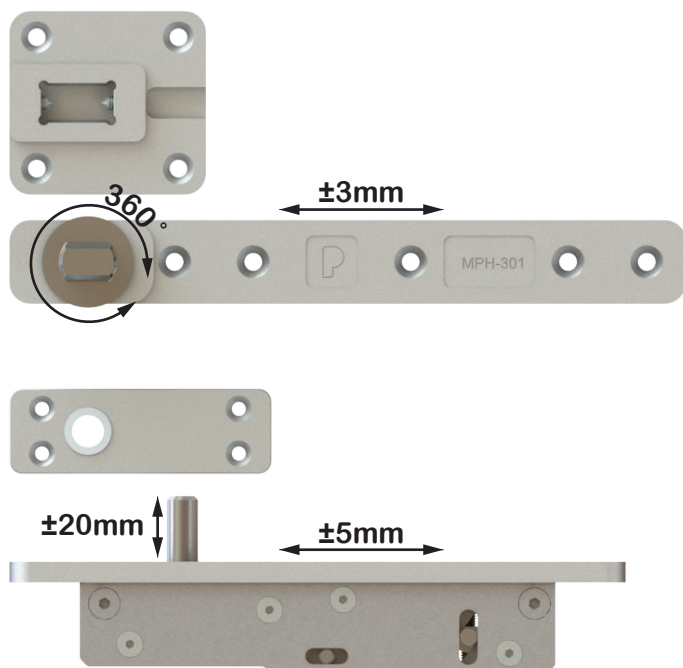

### MPH-300 Technical specifications

- Capacity to load up to 500 kg.
- Door thickness of 40mm to 120mm.
- Safe installation on the bottom side threshold with the pre-installation of M6 female rivets on it.
- Easy and quick installation with zero maintenance needs.
- Easy adjustment with the door installed in its place.
- Horizontal adjustability of  $\pm 5\text{mm}$  of the top side of the mechanism.
- Horizontal adjustability of  $\pm 3\text{mm}$  of the bottom side of the mechanism.
- Freely moving, with no stop point or return mechanism.
- Opens both ways (right - left) with a  $360^\circ$  motion range.
- Allows the transfer of fully assembled, ready for installation doors.
- Suitable for large doors, made of steel, wood, aluminium or glass (with frame).
- No special infrastructure required on floor and ceiling.
- For external or internal doors with single or double installations.
- For residential or business use.